

[Home](#)
[Browse by Category](#)
[Laundry](#)
[Washers](#)
[Front Load](#)
[WFW9150WW](#)

Whirlpool® Duet® Front Load Washer with TumbleFresh™

 [Send Page to Printer](#)



- [+ Larger View](#)
[+ Product Demo](#)

WFW9150WW

Whirlpool® Duet® Front Load Washer with TumbleFresh™

MSRP\$749.00

MAJOR APPLIANCE

OBSELETE

[Specifications](#)

[Product Literature](#)

[Electrical Requirements](#)



Available Colors

- ☒ **White**
 Model: WFW9150WW
CLOSEOUT
 MAJOR APPLIANCE
OBSELETE

Order This Item

WFW9150WW 

Enter Quantity:

Related Products



8212487RP
 5' Industrial Grade Nylon Braid
 Fill Hoses - 2 Pack



W10135699
 Affresh™ Washer Cleaner



CLOSEOUT
WGD9150WW
 Whirlpool® Duet® 6.7 cu. ft. Gas
 Dryer with AccelerCare® Drying
 System



CLOSEOUT
W10194073
 Affresh™ Washer Cleaning Kit

Dimensions

Height	36 Inches	Dimensions shown are for planning purposes only. For complete information, see Installation Instructions packed with product.
Depth	30 1/2 Inches	
Width	27 Inches	
Gross Weight	229 LB	

Specifications

Construction

Drum Material	Stainless Steel wash basket
Door Construction	Door Window
Washer Top Finish	Powder Coat

Performance

Key Features


- Smart Temperature Control Helps Reduce Shrinking and Color Bleeding [more](#)
- Conserves natural resources while saving you time and money [more](#)
- Keep Operational Sounds Inside the Washer [more](#)
- Eco Heavy Duty Cycle [more](#)
- TumbleFresh™ Option [more](#)
- 1,200 RPM Maximum Spin Speed
- 3.5 cu. ft. Stainless Steel Wash Basket [more](#)
- ENERGY STAR® Qualified [more](#)
- CEE Tier III Qualified [more](#)
- Deep Clean Wash System [more](#)
- Precision Dispense [more](#)

Dispenser Type	3-tray dispenser drawer (Detergent, bleach and fabric softener)
Temperature Control System	Care Control
Number of Temperatures	3
Spin Speed	1200 RPM
Number of Chambers	3
Detergent Dispenser	Yes
Tier Level	CEE Tier III level
Sound Package	Quiet Series
Number of Cycles	10
Whitest Whites Cycle	Yes
Heavy Duty Wash	Yes
Normal Wash	Yes
Quick Wash	Small Load
Hand Wash	Silk
Clean Washer Cycle	Clean Washer Cycle
Extra Rinse	Yes
Add A Garment	Yes
Control Lockout	Yes
Pedestal Options	
Pedestal Options	15" with drawer, 10" no drawer
Dimensions	
Height	36 Inches
Width	27 Inches
Install Depth Minimum	30 1/2 Inches

- Care Control Temperature Management [more](#)
- Smooth Spin Technology [more](#)
- 10 Automatic Cycles
- 3 Temperature Settings
- 8 Adaptive Wash Actions
- Quiet Wash Noise Reduction System [more](#)
- Heavy Duty Cycle
- Whitest Whites Cycle [more](#)
- Silk Cycle [more](#)
- Small Load Cycle [more](#)
- Delicate Cycle [more](#)
- Clean Washer Cycle with Affresh® [more](#)
- Delay Wash (up to 10 hours) [more](#)
- Stainless Steel Wash Basket [more](#)
- Add-A-Garment Indicator Light [more](#)
- Adjustable End-of-Cycle Signal
- Automatic Dispenser System [more](#)

Product Literature

[Owners Manual](#) (8108.26 KB)
[Dimension Guide](#) (538.54 KB)
[Energy Guide](#) (376.02 KB)
[Warranty](#) (46.57 KB)

You may need to install Adobe Acrobat Reader  to view these documents.

UPC Listing

Model "WFW9150WW" UPC: 883049188102

[Home](#) [Browse by Category](#) [Laundry](#) [Dryers](#) [Electric Dryer](#) [WED9150WW](#)

Whirlpool® Duet® Electric Dryer with AccelerCare® Drying System

 [Send Page to Printer](#)[+ Larger View](#)
[+ Product Demo](#)

WED9150WW

Whirlpool® Duet® Electric Dryer with AccelerCare® Drying System

MSRP\$749.00

MAJOR APPLIANCE

OBSELETE[Specifications](#) [Product Literature](#) [Electrical Requirements](#)

Available Colors

☐ **White**
Model: WED9150WW
CLOSEOUT
MAJOR APPLIANCE
OBSELETE

Order This Item

WED9150WW Enter Quantity:

Related Products

**PT400L**
4' 4-Wire 30 amp Dryer Cord**W10121663**
Front Load Dryer Rack**8572546**
Duet Sport & Epic z™ Stack Kit**PT220L**
4' 3-Wire 30 amp Dryer Cord

Dimensions

Height	36 Inches	Dimensions shown are for planning purposes only. For complete information, see Installation Instructions packed with product.
Depth	29 Inches	
Width	27 Inches	
Gross Weight	134 LB	

Specifications

Capacity

Total Capacity 6.7 Cu. Ft.

Construction

Top Finish Painted

Drum Material Painted Steel Drum

Door Window Dryer Door Window

Key Features

- Built-in Sensors Help Prevent Overdrying [more](#)
- Energy-Saving Technology Saves You Time and Money [more](#)
- Keep Operational Noise Out of Your Living Spaces [more](#)
- Eco Normal Cycle - Duet [more](#)
- AccelerCare® Drying System [more](#)
- 8 Automatic Cycles
- Timed Drying
- Wrinkle Shield™ Plus Option (up to 60 Minutes) [more](#)
- Adjustable End-of-Cycle Signal

Product Literature


[Owners Manual](#) (2982.66 KB)

Reversible Door	Reversible Side-Swing Door
Door Swing	Side Swing
Controls	
Controls	Electronic Control
Performance	
Drum Light	Interior Drum Light
Lint Screen Location	Front-Mounted Lint Screen
Moisture Sensor	AccelerCare Drying System
Number of Cycles	8
Heavy Duty	Yes
Normal	Yes
Timed Dry	Time Dry 60 min
Quick Dry	Small Load
Wrinkle Guard	Wrinkle Shield Plus Feature
End of Cycle Signal	End of Cycle Signal
Cool Down	Drying/Cool Down
Number of Temperatures	4
Dimensions	
Height	36 Inches
Width	27 Inches
Depth	29 Inches

[Dimension Guide](#) (512.66 KB)

[Installation Instructions](#) (6889.14 KB)

[Warranty](#) (121.86 KB)

You may need to install Adobe Acrobat Reader  to view these documents.

Electrical Requirements

15-20Amps. 60Hz.

UPC Listing

Model "WED9150WW" UPC: 883049188188



Front-Loading Automatic Washer

PRODUCT MODEL NUMBERS


WFW9150W

Electrical: A 120 volt, 60 Hz., AC only, 15- or 20-amp, fused electrical supply is required. A time-delay fuse or circuit breaker is recommended. It is recommended that a separate circuit serving only this appliance be provided.

Drain System Options

Standpipe drain system - wall or floor (views A & B)

The standpipe drain requires a minimum diameter standpipe of 2" (50 mm). The minimum carry-away capacity can be no less than 17 gal. (64 L) per minute. The top of the standpipe must be at least 30" (762 mm) high and no higher than 96" (2.4 m) from the bottom of the washer.

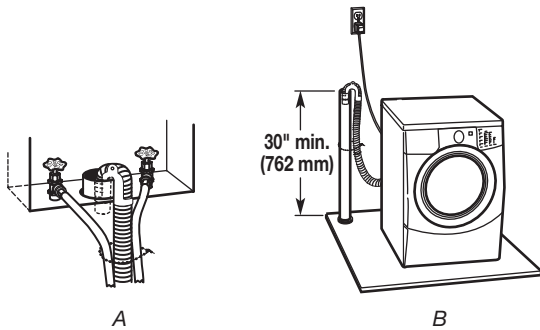


Laundry tub drain system (view C)

The laundry tub needs a minimum 20 gal. (76 L) capacity. The top of the laundry tub must be at least 30" (762 mm) above the floor.


Floor drain system (view D)

The floor drain system requires a siphon break that may be purchased separately. See "Tools and Parts." The siphon break must be a minimum of 28" (710 mm) from the bottom of the washer. Additional hoses might be needed.

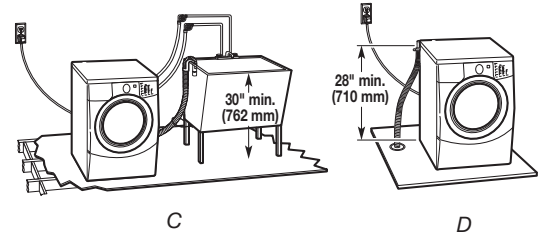


OVERALL DIMENSIONS


Washer dimensions

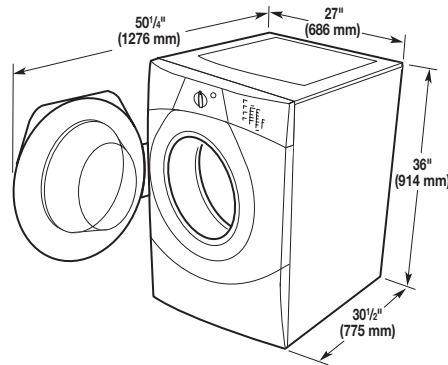


Custom undercounter installation-dryer only

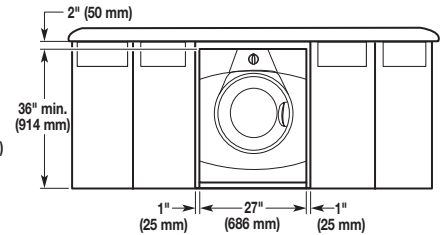

For closet installation, with a door, the minimum ventilation openings in the top and bottom of the door are required. Louvered doors with equivalent air ventilation openings are acceptable.

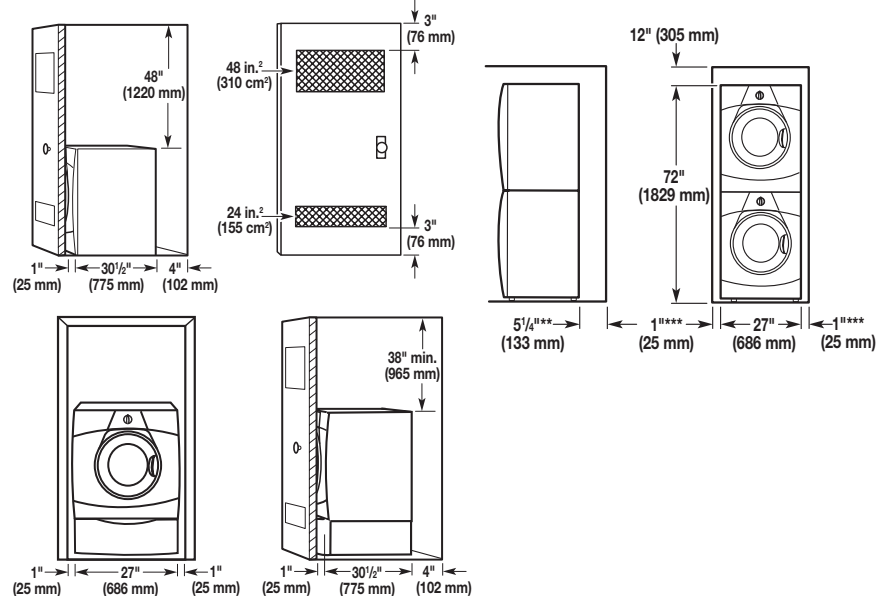

For cabinet installation, with a door, the minimum ventilation openings in the top are required.

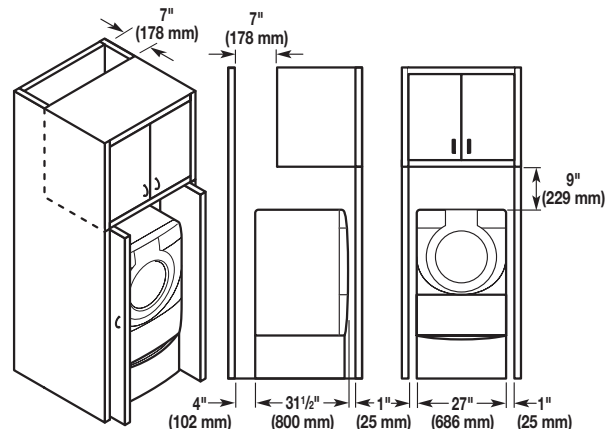



Electric Dryer


PRODUCT MODEL NUMBERS

WED9150W, WED9250W,
WED9050X, WED9270X

Electrical: This dryer requires a 3 or 4 wire, single phase, 120/240 volt, 60 Hz, AC only electrical supply (or 3 or 4 wire, 120/208 volt electrical supply, if specified on the serial/rating plate) on a separate 30-amp circuit, fused on both sides of the line. Connect to an individual branch circuit. Do not have a fuse in the neutral or grounding circuit.

Exhaust venting: Exhaust your dryer to the outside. 4" (102 mm) diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do not use plastic or metal foil vet. Exhaust hood must be at least 12" (305 mm) from the ground or any object that may be in the path of the exhaust.

Hood styles: A & B are recommended.

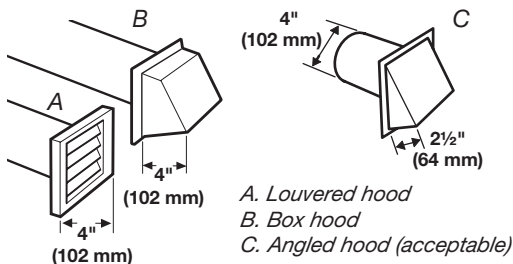

The Vent system chart provides venting requirements that will help achieve best drying performance.

NOTE: Side and bottom exhaust installation have a 90° turn inside the dryer. To determine maximum exhaust length, add one 90° turn to the chart.

Vent system chart			
Number of 90° elbows	Type of vent	Box/louvered hoods	Angled hoods
0	Rigid metal	64 ft. (20 m)	58 ft. (17.7 m)
1	Rigid metal	54 ft. (16.5 m)	48 ft. (14.6 m)
2	Rigid metal	44 ft. (13.4 m)	38 ft. (11.6 m)
3	Rigid metal	35 ft. (10.7 m)	29 ft. (8.8 m)
4	Rigid metal	27 ft. (8.2 m)	21 ft. (6.4 m)

Do not use vent runs longer than specified in vent length chart.

Determine the number of elbows you will need.


Select the route that will provide the straightest and most direct path outdoors.

Plan the installation to use the fewest number of elbows and turns.

Use the fewest 90° turns possible.

OVERALL DIMENSIONS

Dryer dimensions

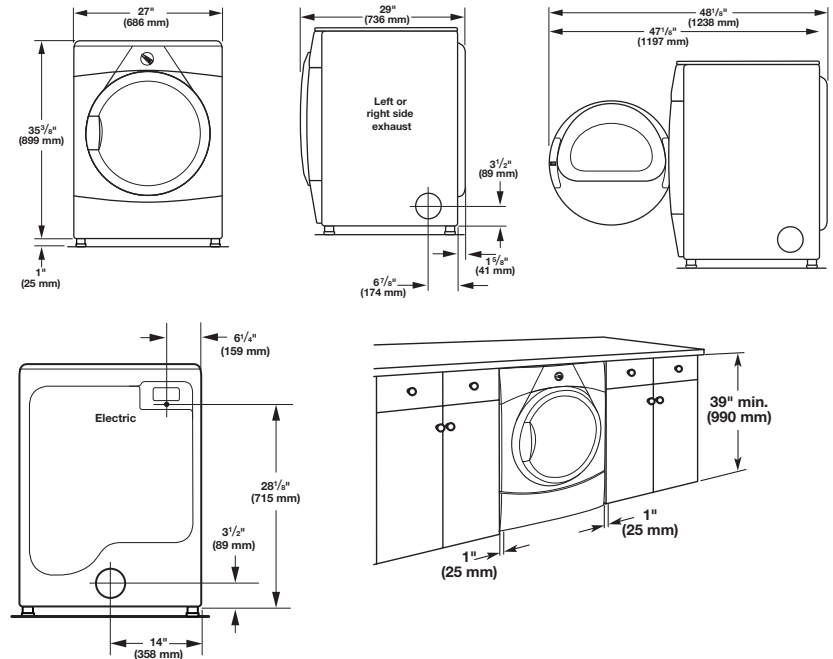

Minimum Required Spacing

